

# SOLAR STREET LIGHTING - PYRAMID RANGE – G3

## Multiple Benefits of Silicon CPV Solar Powered Street Lights:


- Solar Panels vertically integrated into pole for maintenance free operation
- Uses free electricity from the sun, environmentally friendly and pollution-free
- Battery bank charge controller, LED driver, communication interface all in a single removable cartridge
- Easy to install and safe to use
- Computer-controlled EMS
- No costly or complicated pipe-laying or underground wiring required
- No cabling required
- One unit so no separate battery
- Solar panel 25-year service life
- Special chemistry lithium battery designed for 7 year service life in elevated temperatures
- Remote wireless connectivity
- No costly maintenance



## GSM or Internet based remote management

Our vision is simple – to develop and manufacture advanced Solar LED Street Lighting systems that will greatly reduce the cost of generating clean electricity from the sun’s energy. Silicon CPV’s solar powered street lights are the most economic, reliable and versatile means of providing street lighting. With a high efficiency long-life light source of up to 80,000 hours, the self-contained units are not only lightweight (less than 19kg per unit).


The economic advantage of solar lighting is very clear – deploying a solar light requires no timely and often costly overhead or underground electrical wiring. Further, not having to provide additional electricity from the grid for lighting avoids the incredible expense of power plants and electrical distribution equipment. The self-contained unit simply converts sunlight during the daytime into electricity and stores it into the battery.

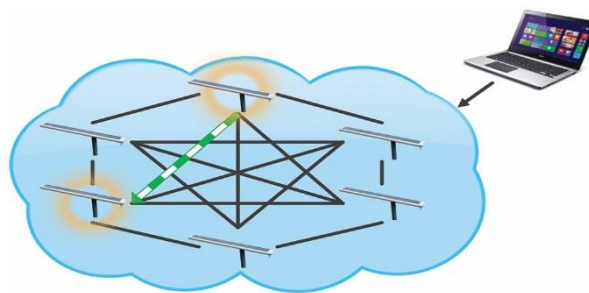

After sunset, the solar panel will detect a drop in ambient light and the system will automatically turn on the light. The LED light source complete with integrated lens ensures that all light produced is directed along the road exactly where required.

## Pyramid Range

- From 6,500 to 38,800 Lumens
- 8 Year Battery Life
- IENSA Type II, Type III and Type IV Optics
- Pole height from 6m to 11m
- Pole spacing up to 5 times pole height
- Built-in wireless communications link for remote monitoring and management
- Very quick and easy installation
- Solar lighting can save the owners large amounts of money by eliminating trenching, wiring and electricity costs and also ensures that there are few or no landscaping issues
- Compared to traditional grid-tied lighting, the solar LED lights do not require timers and their LED fixtures eliminate regular maintenance visits. In more remote places, solar lights are also a way to help prevent theft
- Solar lights are good for the environment. Using only the limitless clean energy from the sun, they have the benefit of using less material and labour to install, further reducing the carbon footprint.

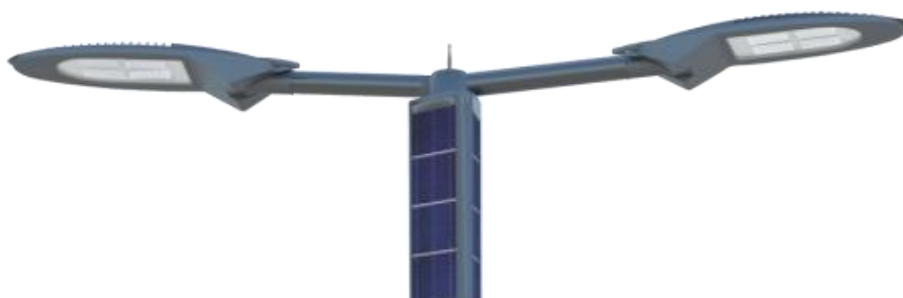

Specifications	Pyramid 6m – G3	Pyramid 6m Twin – G3	Pyramid 8m – G3	Pyramid 8m Twin – G3	Pyramid 11m – G3	Pyramid 11m Twin – G3
Maximum Light Output Phase 1 (Lumens)	6,500	2 x 6,500	12,900	2 x 12,900	19,400	2 x 19,400
Battery - Type	Lithium					
Capacity (Wh)	397	794	794	1,588	1,190	2,381
Battery - Service Life	8 Years at 65% DoD and at 45° ambient					
Light Source - Type	High Efficiency LED, 5000K Colour Temperature					
Light Out Put (Lumen Hours) 90% DoD	71,460	142,920	142,920	285,840	214,290	428,580
Number of LEDs	96	2 x 96	96	2 x 96	192	2 x 192
Light Head Lifetime	80,000hrs to LM80 specifications					
Optical Efficiency	>93%					
Main Body	Aluminum Alloy					
Pole Integrated Solar Panels	105W	210W	210W	420W	315W	630W
Solar Panel Size	2x1680x172	4x1680x172	4x1680x172	8x1680x172	6x1680x172	12x1680x172
Solar Panel - Service Life	25 Years					
Controller	Microprocessor based Energy Management and Wireless Communications					
Wireless Network	Proprietary Wireless Network allows Remote Management and Control of Lights using Internet or GSM. One gateway per 200 lights and all the gateways report to a central control room.					
Light Control	Intelligent Adaptive Light level control based on energy received or a predefined user selectable light level					
Light Hours	Programmable trigger levels from "Dusk to Dawn"					
Optics	Option for 8 different light profiles available for each light					
Integrated Pole Height	6 meters	6 meters	8 meters	8 meters	11 meters	11 meters
Pole Spacing for T2 Optics	5 times Pole height for T2 Optics (IENSA Type II)					
Light Envelope (m <sup>2</sup> ) for T2 optics	180	2 x 180	320	2 x 320	605	2 x 605
Average Light level (Lux)	24	24	26	26	23	23
Weight (Kg)	90	100	120	130	160	180
Operating Temperature	-20°C to +60°C					
Protection Rating	IP65					
Standards Compliance	BS 5489:2003 EN13201, ME4a, IESNA Type II or Type III					

### Silicon CPV Ltd,

Akhter House, Perry Road, Harlow,  
Essex CM18 7PN, UK

+44 (0) 1279 821260

+44 (0) 1279 821300

enquiries@siliconcpv.com

www.siliconcpv.com

### Silicon CPV Ltd, Africa,

7 rue Benzerte,  
Rabat, Morocco

+212 537 765 720

+212 537 765 720

info@siliconcpv.com

www.siliconcpv.com



Part Code: Pyramid Range

