

# SCPV - TEMPEST - 200A - Shielded Room Enhanced Filters

Silicon CPV's TEMPEST Shielded Room filters have been designed for use within stringent TEMPEST environments and applications, for attenuation from 10KHz – 40GHz at 100dB. Shielded rooms require high levels of attenuation to ensure no conducted or radiated emissions are either imported or exported from the room.

Silicon CPV filters come in 2 or 4 wire options with current ratings of up to 250A per phase. The filters are manufactured in rugged steel enclosures, plated and painted, providing a robust filter solution.

Silicon CPV can also supply additional transient suppression option to the filters if required to give protection against induced transients from EMP sources.



**TEMPEST FILTERS**  
with builtin  
**HEMP PROTECTION**  
E1 / E2 Pulses

## Typical Applications, Technical and Commercial benefits

- Shielded rooms and enclosures
- Military and IT installations
- Computer rooms
- High current capability - compact size
- High common & differential mode insertion loss
- Improved low frequency performance
- Optional input transient suppression to suit unique applications
- Assists in compliance with prevailing EMC directives
- State of the art technology ensures superior performance
- Small size - Reduced weight - Simple mechanical and electrical installation
- Compliant with relevant BS, VDE, UL, CE & CSA safety standards
- Conforms to MIL-STD 220A and the electrical characteristics of Mil-F-15733
- EN 60939-2-2005 compliant
- Filters comply with basic requirements of the EMC directive 2014/30/EU
- RoHS compliant
- **HEMP Protection E1/ E2 pulses**


SCPV TEMPEST Model No	Current AC (A)	Voltage AC (V)	No of wires	Max AC (V)	Dimension L-W-H mm	Typical Earth Leakage mA (worst case)			Phase	Inductance per line (Typical) mH	Transient Energy Absorption (Typical)
						Std	LE	400Hz			
200A4SRH	200	400	4	520	750,410,145	2K	40	4000	Three	0.3	200J opt

### Ratings and Characteristics


Storage Temp Range	-25°C to 85°C
Case material	Steel
Operating Temp Range	-20°C to 50°C
Termination Type 200A	Bolt size M10
Conforms to	MIL-STD 220A Mil-F-15733

Max Temp Rise @Full Load	<35°C
Max AC Volt Drop @ Full load	<2V/Line
Weight Kg (approx.) 200A	4 wire 30

### Performance Characteristics and Insertion Loss Curves

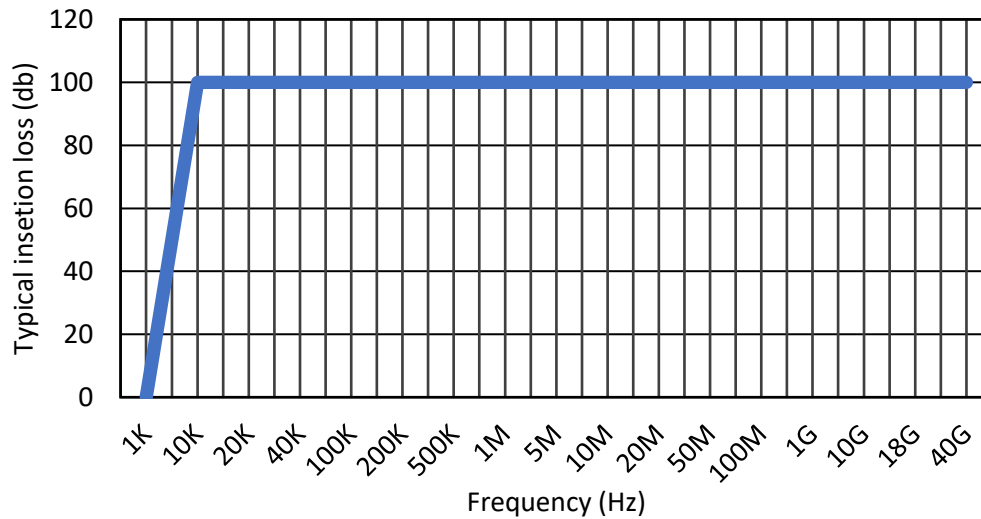

### Schematics

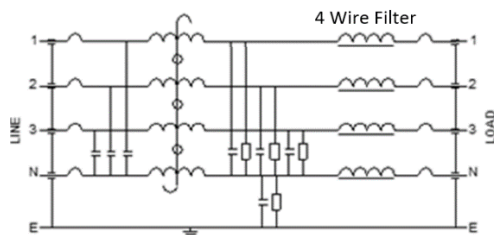

### Part No and Ordering Information

Order Part No	Product Description
<b>SCPVSHIELD200A4SRH</b>	SCPV - TEMPEST Shielded Room 200A 4 Wire Enhanced Filter Three Phase